




Three valve manifold for differential pressure gauges. Two horizontal inlets NPT male at bottom side. Two outlets with rotating for nuts 1/2\"BSP F on top side. Equalizing bonnet at front, isolating bonnets at left and right hand side. Also available in 50mm tap spacings Series - 3VC50.

Standard Connection

Product	Process side	Instrument side
3VC	1/2\"NPT male	1/2\"BSP Rotatable nuts

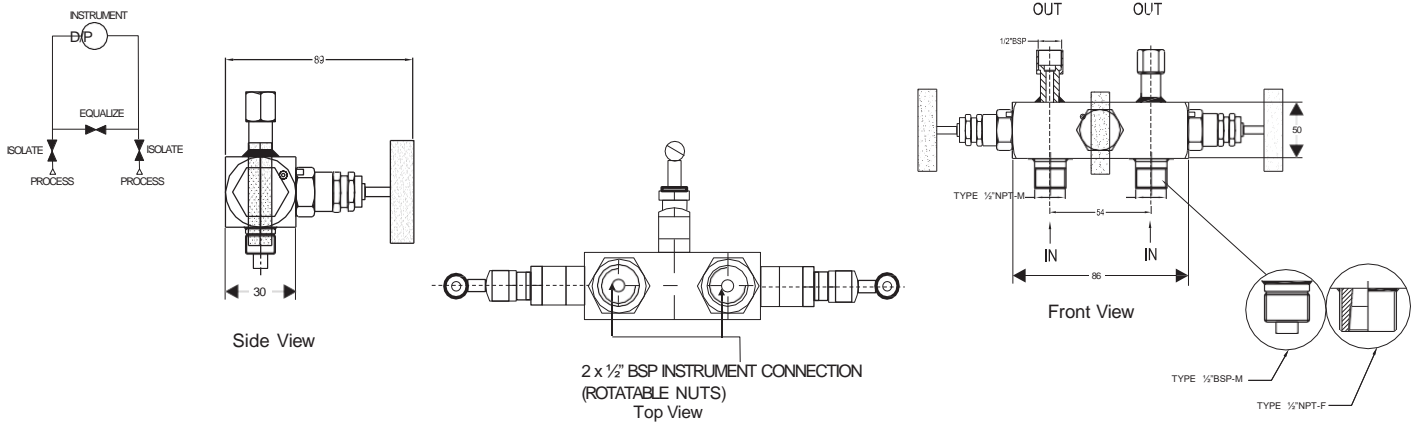

Notes : • Drawings are not to scale. • All Dimensions are in mm.

Specifications

Body	: SS 316
Stem	: SS 316
Valve assembly	: SS 316
'T' bar handle	: SS 304
Maximum working pressure	: 6000 psi
Maximum working temperature	: 240°C
Packing	: PTFE
Type of stem	: Type CT; Stem with conical metal tip
Drain port	: 1/4\" NPT [F], provided with SS 316 plug
Bracket mounting holes	: 2 Nos.

How To Order

Body Material	Stem Type	Stem Packing	Size = Inlet x Outlet	Connections	Threads
C = Carbon Steel	CT (std)	P = PTFE (std)	24 = 1/4" x 1/4"	FF = Female x Female (Std)	N = NPT (ANSI B 1.20.1)
C = SS 316 (std)	DS	G = Grafoil	44 = 1/2" x 1/2" (std)	SW = Socket Weld	P = BSPP (BS 2779, ISO 228/1)
S4 = SS 304				MR = Male x Female Rotating	B = BSPT (BS 21, ISO 7/1)
SL = SS 316L				FR = Female x Female Rotating	
M4 = Monel 400					
M5 = Monel 500					
H = Hastelloy C					

Options

- TF** : Compliance to NACE standard
- SG** : For Oxygen service, valves are supplied cleaned, degreased and suitably packed.
- GH** : Material test certificate*
- GO** : Hydro test certificate

*Material test certificates will be provided for wetted parts only with chemical composition testing. For others, please consult factory.

Example

To place an order simply refer to the codes in the table.

Valve Type : Body Material + Stem Type + Stem Packing + Size Connections + Threads + Options

3VC + C + CT + P + 44 FR + N = 3VC . C . CT . P . 44 . FR . N . Options

NOTE:

- The weld prepared types are available with female plain end - suitable for socket weld.
- Anti-tamper bonnet - special design on request with locking arrangement if desired.

Note : Specifications and dimensions given in this product catalogue represents the state of engineering at the time of printing .
Modifications may take place and materials specified may be replaced by others without prior notice.